


1. Features:

- Full magnetic shielded type designed for the applications of inductance value range from 10 μ H to 22 μ H with high current (Isat 7.3~11.2A, Irms 3.3~5.0A), and mini-size (L*W*H=10.9*10.0*7.9).
- Robust molded construction, dual winding, ideal for SEPIC(DC/DC) converters.
- 500Vrms, one minutes isolation between Coils and Ferrite Core.
- Over 100M Ω insulating resistance at 100Vdc between Coils and Ferrite Core.
- Magnetic shielded structure, excellent resistance to electro-magnetic interference(EMI).
- Operating temperature range: -55 $^{\circ}$ C to +155 $^{\circ}$ C (Including coil temperature rise due to self-generated heat).
- Storage temperature range: -20 $^{\circ}$ C to +85 $^{\circ}$ C.
- Design, material selection, and manufacturing process meet AEC-Q200 requirements.
- RoHS Compliant.

2. Appearance dimensions (mm/inch):

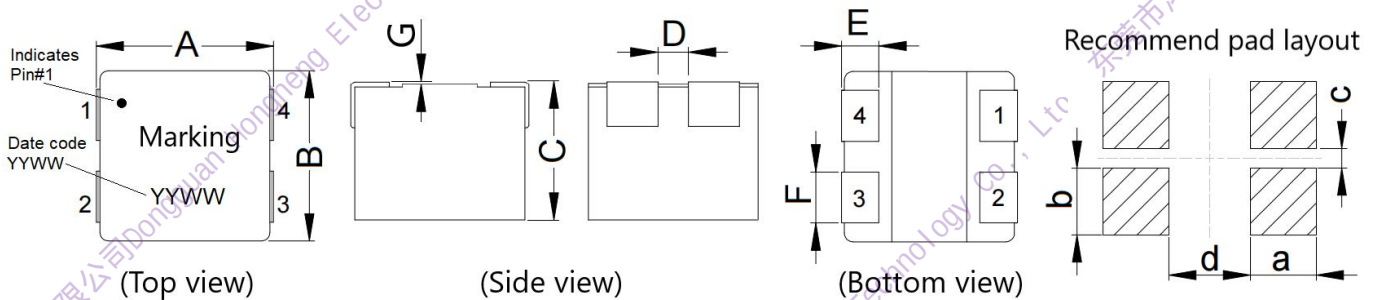



3. Electronic characteristics :


*Equivalent and substitute products	Product P/N M-code	Inductance (μ H) @ 100kHz/1Vrms	DCR (m Ω) @25 $^{\circ}$ C	Isat (A) (Typ.)	Irms (A) (Typ.)	Marking
HCSA1V1008-100-R	HCM1V1008-100M	10.0 $\pm$ 20%	45.0 Max.	11.2	5.0	100M
AABM10A80M150 HCSA1V1008-150-R	HCM1V1008-150M	15.0 $\pm$ 20%	64.5 Max.	9.1	4.6	150M
AACM10S90M220G HCSA1V1008-220-R	HCM1V1008-220M	22.0 $\pm$ 20%	84.0 Max.	7.3	3.3	220M

Remarks:


- * All test data is referenced to 25 $^{\circ}$ C ambient temperature .
- * Test equipment: VC4092B, TH2516B, HP4284/HP4284A ,HP4285 or equivalent .
- * Isat: The value of DC current at which the inductance value drops approximately 30% from its initial value.
- * Irms: DC current that causes the temperature rise (Δ T=40 $^{\circ}$ C) from 25 $^{\circ}$ C.

4. Characteristics cure:

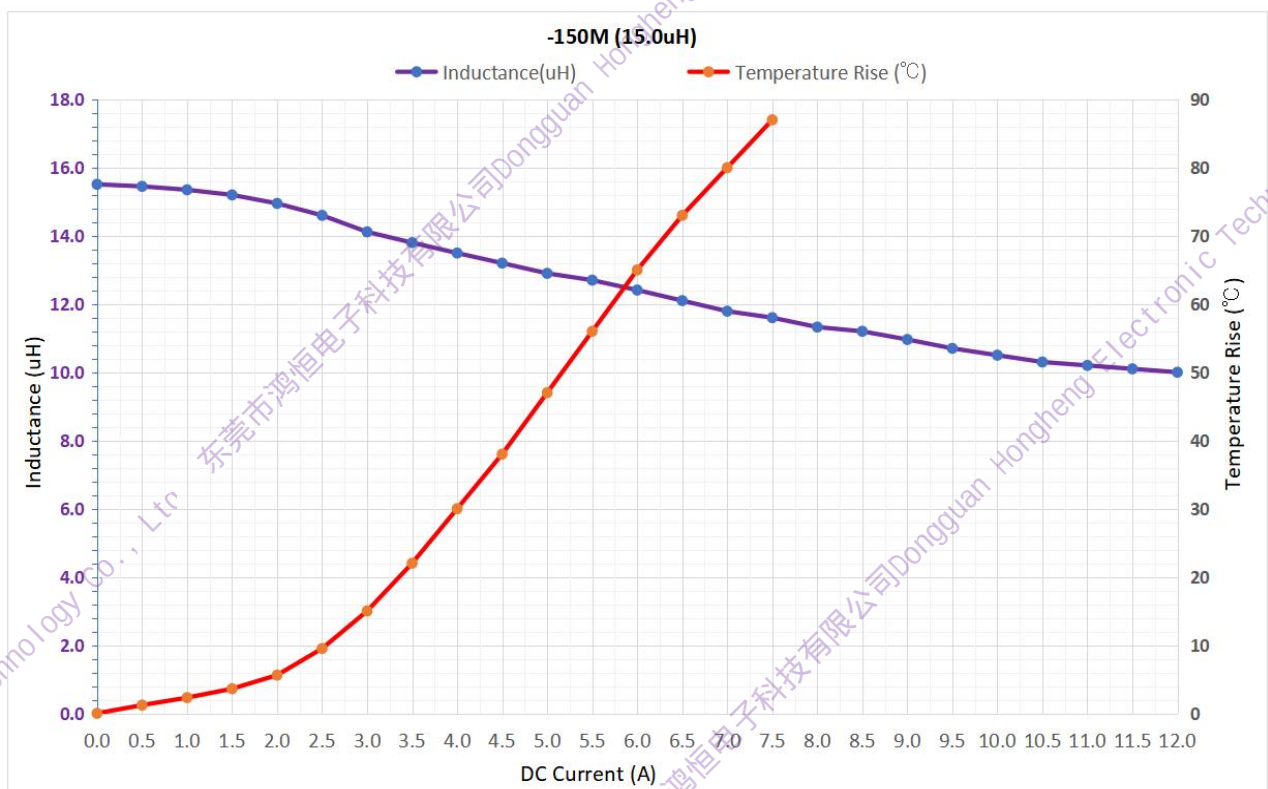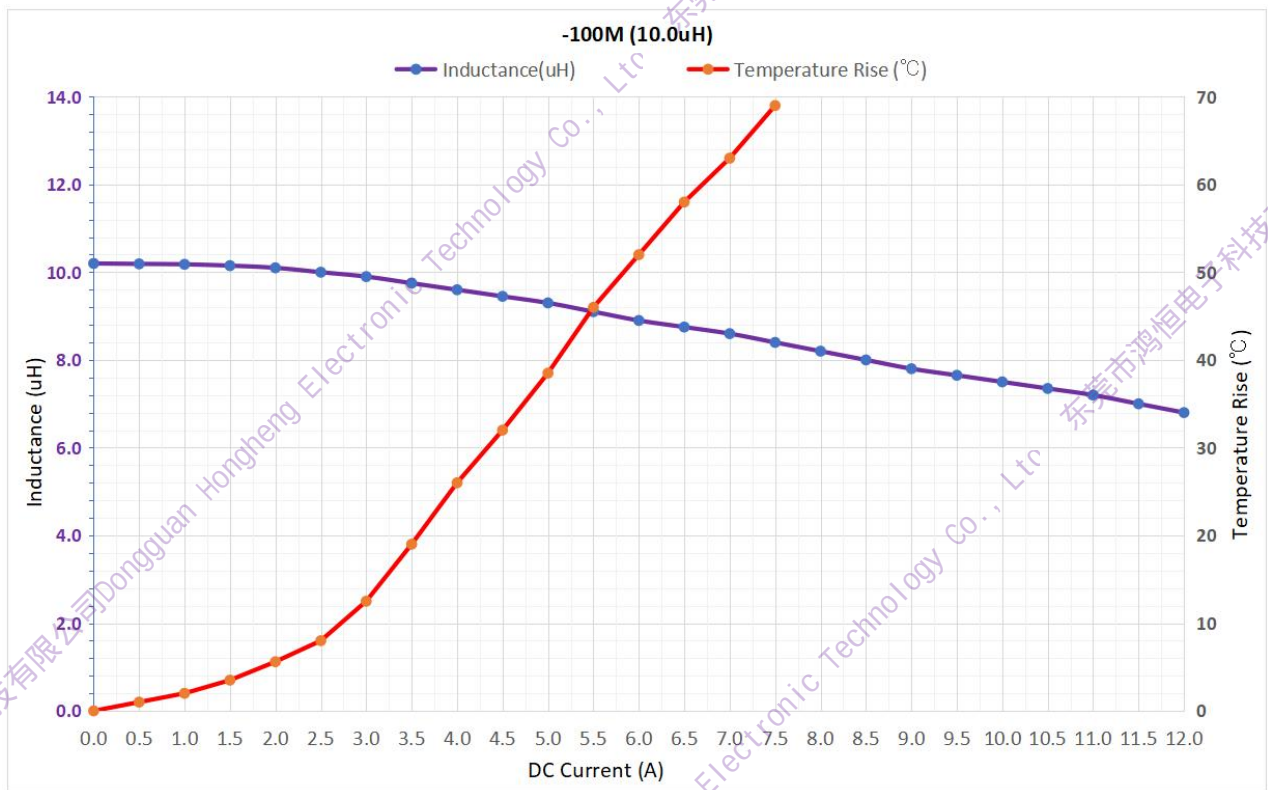


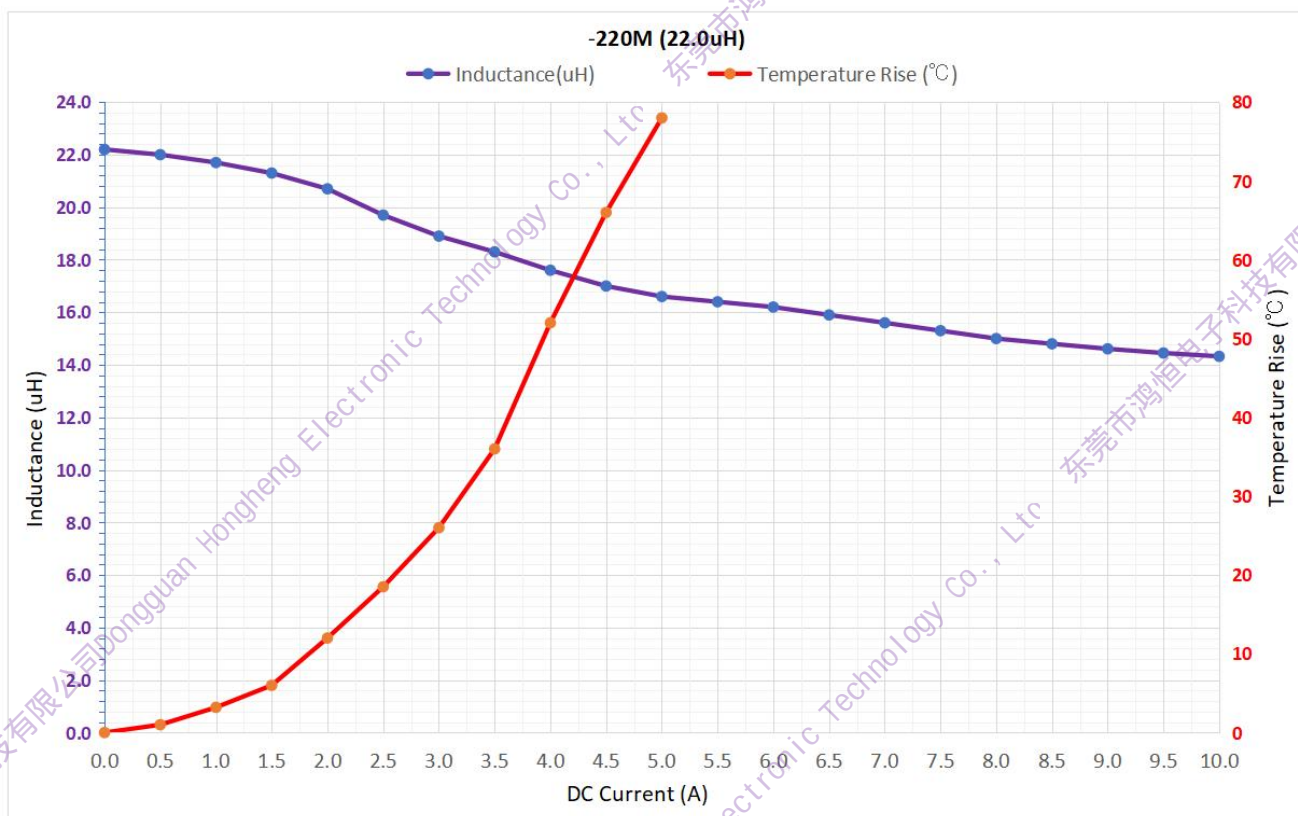

5. General characteristics:


No.	Item	Specification	Test method
1	Storage temperature range	-20°C ~ 85°C	
2	Operation temperature range	-55°C ~ 155°C (Including coils's temperature rise)	
3	External appearance	No external defect can be found by visual inspection	
4	Dielectric Strength	Over 100 MΩ at 100V D.C . between wire and core	
5	Dielectric Strength	Apply at 0.5KV 3mA for 1 minute between wire and core	
6	Solderability test	90%min. of the immersed areas should be covered by new solder(Sn-0.3Ag-0.5Cu)	Terminals are immersed in flux for 5 seconds, then dipped in melting solder at $245 \pm 5^\circ\text{C}$ for 5 ± 0.5 seconds. *Flux composition:25% rosin(JIS-K-5920)+75% ethanol (JIS-K-8101). *Pre-treatment : PCT:105°C/100%RH/1.22atm/*H.
7	Terminal Strength		After soldering , between copper plaet and terminals of coils , push in two directions of X , Y with standing 10N(1.02kg) for 10+/-2 sec. Terminal should not peel off. (Refer to figure at right)
8	Vibration test	Electronic characteristics shall be satisfied	Vibrating at the frequency varying uniformly from 10Hz to 2000Hz then return to 10Hz in 20 minutes at the acceleration of 5G for 4 hours in each of 3 mutually prependericual directions.
9	Heat resistance	Appearance : No damage Inductance change from the initial value: within $\pm 10\%$	Temperature : $180^\circ\text{C} \pm 2^\circ\text{C}$ Time : 1000 h (+48h , -0h) Then measured after exposure in the room condition for 24±2 hours.
10	Cold resistance		Temperature : $-60^\circ\text{C} \pm 2^\circ\text{C}$ Time : 1000 h (+48h , -0h) Then measured after exposure in the room condition for 24±2 hours.
11	Humidity		Temperature : $40^\circ\text{C} \pm 2^\circ\text{C}$ Humidity : 90 %(RH) to 95 %(RH) Time : 1000 h (+48h , -0h) Then measured after exposure in the room condition for 24±2 hours.
12	Temperature cycle (Shock testing)		1 cycle : 1 step : $-55^\circ\text{C} \pm 2^\circ\text{C}$ / 30 min ± 3 min 2 step : Ordinary temp. / 10 min to 15 min 3 step : $+155^\circ\text{C} \pm 2^\circ\text{C}$ / 30 min ± 3 min 4 step : Ordinary temp. / 10 min to 15 min Total of 10 cycles Then measured after exposure in the room condition for 24±2 hours.
13	Heat endurance of reflowsoldering		Refer to figure (IR Reflow profile)

IR Reflow profile

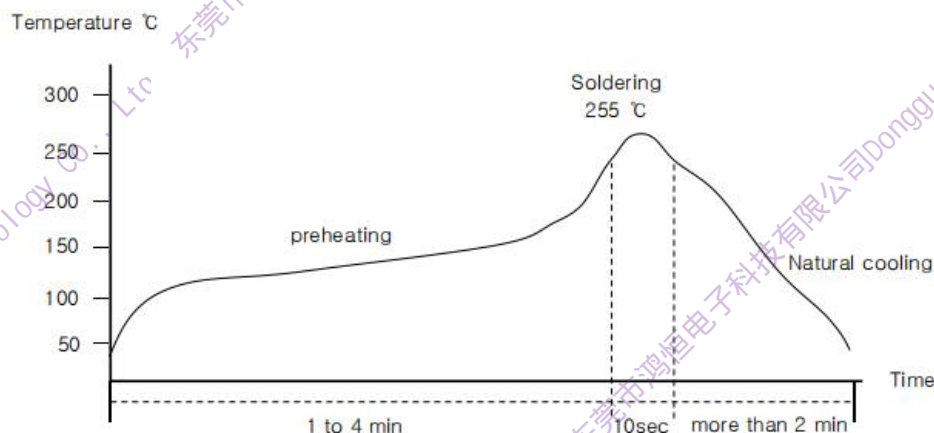

6. Packing :

*Dimension (mm):

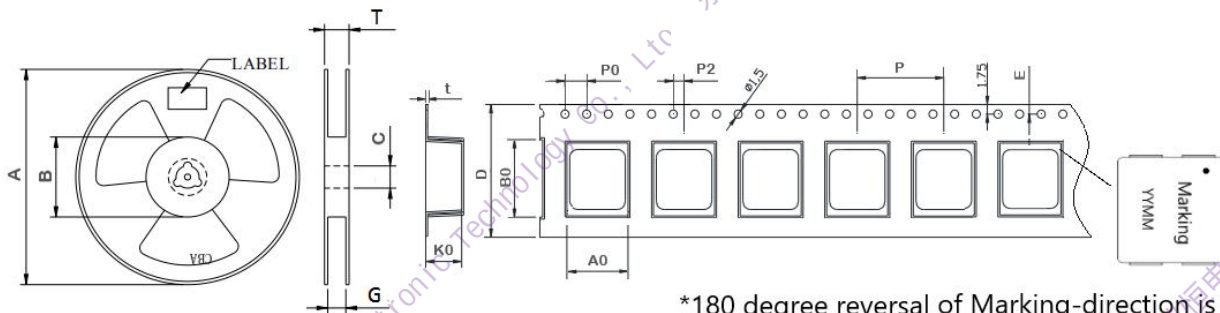

*180 degree reversal of Marking-direction is acceptable.

STAYL E	QTY (PCS)	A	B	C	D	G	E	T	A0	B0	K0	t	P	P0	P2
13"	500	330	60	13.5 ±0.5	24.0 ±0.2	25.0 ±0.5	11.5 ±0.1	29.0 ±2.0	10.8	11.6	8.5	0.35	16.0 ±0.1	4.0 ±0.1	2.0 ±0.1

*Packing Quantity 包装数量 :

Quantity / Reel 数量 / 卷	Quantity / Inner Box 数量 / 内盒	Quantity / Outside Carton 数量 / 外箱	N.W. / Outside Carton 净重 / 外箱	G.W. / Outside Carton 毛重 / 外箱
500 pcs	(500x2)1000pcs	(1000x3)3000pcs	11~13 kg	12.5~15 kg
* Packing Quantity may vary depending on the order volume. 包装数量会因订单量而异。				

* Label 标签:

All the labels on the reel , inner box and outer box are the same,
and the format and content of the label is shown as the right table.
(Production Lot/ batch number refers to the week number(YYWW))
外箱、内箱、卷盘标签相同， 标签的格式和内容如右表所示。
(生产批号，即 YYWW 周期号)

品番/物料编码 Part No./Material code	
规格型号 Model,description	
数量 Quantity	
批号 Lot. No.	